

1417-180A
VMD:cjk



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of)
James D.Y. COLLIER et al.)
Serial No. 09/618,296) Group Art Unit: 2745
Filed: July 18, 2000) February 1, 2001
For: VARIABLE OSCILLATOR)

RECEIVED
FEB - 2 2001
TC 2600 MAILROOM

CLAIM FOR PRIORITY

Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

Applicants hereby claim priority under 35 U.S.C. 119 for the above-identified application on the basis of British Patent Application No. 9916907.0, filed July 19, 1999, and cited in the Declaration of this application.

Under the requirements of 35 U.S.C. 119, a certified copy of the original British application is submitted herewith in support of this claim for priority.

Respectfully submitted,

By Vincent M DeLuca

Vincent M. DeLuca
Attorney for Applicants
Registration No. 32,408
ROTHWELL, FIGG, ERNST & MANBECK, p.c.
Suite 701-E, 555 13th Street, N.W.
Washington, D.C. 20004
Telephone: (202)783-6040

THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

Best Available Copy

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

Signed

W. Evans

Dated 21 July 2000


Best Available Copy

RECEIVED
FEB -2 2001
TC 2600 MAILROOM

THIS PAGE BLANK (USPTO)

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



1. Your reference **89995/PRS/VU**

2. Patent application number
(The Patent Office will fill in this part) **9916907.0**

3. Full name, address and postcode of the or of each applicant (underline all surnames) **19 JUL 1999**

**CAMBRIDGE SILICON RADIO LTD
UNIT 300
SCIENCE PARK
MILTON ROAD
CAMBRIDGE
CB4 0XL**

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

4. Title of the invention **VARIABLE OSCILLATOR**

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

**PAGE WHITE & FARRER
54 DOUGHTY STREET
LONDON
WC1N 2LS
UNITED KINGDOM**

Patents ADP number (if you know it)

1255003

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	----------------------------------------------	-------------------------------------

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)
-------------------------------	-------------------------------------

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body
See note (d))

YES

9. Enter the number of sheets of any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	11
Claim(s)	6
Abstract	1
Drawing(s)	2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

19 JULY 1999

12. Name and daytime telephone number of person to contact in the United Kingdom

P R SLINGSBY

0171 831 7929

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

VARIABLE OSCILLATOR

This invention relates to variable oscillators, in particular oscillators whose frequency of oscillation is variable in response to a frequency setting signal and which can be trimmed by means of a separate trimming signal.

Figure 1 shows one form of variable oscillator. The circuit of figure 1 includes a resonant portion 101, which produces an oscillating signal at 102, and an amplifying stage 103, which enhances the signal at 102 by sustaining the resonance of the resonant portion. The resonant portion comprises capacitances 105 and 106 and an inductance 107 connected in series. The capacitances are variable capacitance ("varicap") diodes 107, 108 whose capacitance varies in dependence on the voltage applied at a control input 109. Thus the frequency of the oscillator can be varied by means of that voltage, and the oscillator is a voltage-controlled oscillator.

In many applications of oscillators such as the one shown in figure 1 there is a need to arrange the oscillator accurately so that a pre-defined range of frequencies can then be tuned over exactly using the varicap diodes 107, 108. For example, in many communications applications the oscillator may be required to operate at one of a number of pre-defined frequencies that correspond to the frequencies of available communication channels. In order for the communications terminal that uses the oscillator to establish communication with another terminal the frequencies used by the two terminals must match each other precisely. In production there is often significant variation between the values of the circuit components between individual oscillators. This is especially significant when the oscillator is built on-chip. (Typical variation in the values of on-chip components are: $\pm 30\%$ for resistors, $\pm 10\%$ for capacitors and $\pm 7\%$ for inductors; the values also being strongly dependant on temperature). Therefore, it is common for the oscillator to be trimmed after production so that the pre-

determined channel frequencies can then each be selected by applying a corresponding channel-setting voltage at the control input 109.

One way to perform the trimming operation is by using the varicap diodes 107, 108 themselves. A trimming offset voltage can be applied to the control input 109 to ensure that when the channel-setting voltages are also applied to the control input 109 the pre-determined channel frequencies are generated accurately. However, this approach requires the varicap diodes to have sufficient throw (range) to be capable of adjusting the resonant frequency not just over the frequency envelope of the available channels but also over an additional range to cope with the need for trimming the circuit. The required total throw is typically around 30%. The effect of this is that, compared to one of smaller throw, the varicap diode is more sensitive to the voltage at the control input 109. As a result, in normal operation it is more difficult to control the varicap diode accurately. Furthermore, the wide pull range implies that much of the oscillation energy of the circuit passes via the varicap diodes 107, 108, which typically have much higher losses (i.e. lower Q) than fixed value capacitors. High loss causes poor phase noise, which substantially degrades the performance of radio receivers, which are a common application of variable oscillators. Another problem is that if the varicap diode has a large throw then the variation in voltage at the control input 9 as a result of the oscillation can itself alter the capacitance of the varicap and therefore modulate the frequency of the circuit. In addition, where the oscillator is used with a phase-locked loop (PLL) the wide range of effective capacitance of the varicaps 107, 108 means that the loop gain of the PLL is subject to variation. This results in poor settling, which is not compatible with the rapid jumps needed for frequency hopping systems. Although this can be addressed by introducing an adjustment for the loop time constant, this is an expensive operation during manufacture.

Another approach is to use the circuit of figure 2. In figure 2 like components are numbered as for figure 1. In the circuit of figure 2 an additional mechanical trimmer 110 is provided in the capacitive portion 105 of the oscillator. This

allows a varicap diode of smaller throw to be used. However, the mechanical trimmer is bulky, relatively expensive and requires an inconvenient step of mechanical adjustment during production. As an alternative to a mechanical trimmer the capacitance 110 could be provided by a monolithic capacitor that can be adjusted during production by laser trimming. However, this approach is inconvenient because it can only be done before the monolithic component is packaged, and expensive because the laser trimming step has a low yield and is incompatible with conventional integrated circuit (IC) processes.

In another known arrangement the continuously variable capacitance unit (e.g. represented by varicaps 107, 108 in figure 1) are arranged in parallel with a finitely variable capacitance arrangement which is capable of capacitance steps just a little smaller than the sweep range of the finitely variable capacitance. With this arrangement a first coarse tuning operation can be carried out after manufacture using the finitely variable capacitance arrangement to bring desired capacitances within the sweep range of the continuously variable capacitance. The setting of the finitely variable arrangement is then fixed. Then during use the continuously variable capacitance can be adjusted to give precisely the desired capacitance. However, the coarseness of the first tuning operation means that the continuously variable capacitance frequently has to operate substantially outside its optimum range.

There is a need for a variable frequency oscillator that can be trimmed more easily and economically, without significant deterioration in performance.

According to one aspect of the present invention there is provided a variable frequency oscillator comprising: an oscillatory circuit for generating a periodic output dependant on the capacitance between a first node and a second node of the circuit, and having a capacitive element connected between the first node and the second node; the capacitive element comprising: a variable capacitance unit, the capacitance of which is variable for varying the frequency of the output; and a plurality of trimming capacitances each being selectively connectable

between the first node and the second node in parallel with the variable capacitance unit to trim the frequency of the output. In this aspect of the invention a switch (preferably an electrically sensitive switch such as a transistor) is suitably connected in series with each trimming capacitance between the first node and the second node for selectively connecting the respective trimming capacitance between the first node and the second node in response to a respective switching signal.

According to a second aspect of the present invention there is provided a variable frequency oscillator comprising: an oscillatory circuit for generating a periodic output dependant on the capacitance between a first node and a second node of the circuit, and having a capacitive element connected between the first node and the second node; the capacitive element comprising: a variable capacitance unit, the capacitance of which is variable for continuously varying the frequency of the output over a frequency range; and a plurality of trimming capacitances each being selectively connectable in series with the capacitive element to trim the frequency of the output in steps of less than half the width of the said frequency range.

The trimming capacitances are preferable finite capacitances.

The plurality of trimming capacitances preferably provide a finitely variable capacitance unit. The trimming capacitances are suitably selectively connectable in parallel with each other.

The oscillator may comprise control apparatus for causing a set of the trimming capacitances to be connected between the first node and the second node. The oscillator may also comprise a memory coupled to the control apparatus for storing information defining one or more sets of the trimming capacitances. The control apparatus and/or the memory may also perform other functions in any device of which the oscillator forms part. Each of the said one or more sets may correspond to a respective operating frequency of the oscillator. The control

apparatus may be capable of retrieving the information defining one of the sets in response to information defining an operating frequency being supplied to the control apparatus. The control apparatus may be capable of retrieving from the memory information defining one of the sets and then causing that set of the trimming capacitances to be connected between the first node and the second node.

At least one of the trimming capacitances may have a different capacitance value from another of the trimming capacitances. Preferably all of their values are different.

The trimming capacitances are preferably capable of trimming the frequency of the output in steps of less than half, and most preferably less than a tenth of the width of the frequency range over which the continuously variable capacitive element is by itself capable of providing adjustment. The trimming capacitances preferably provide for more than 10 and most preferably more than 40 or 50 finite adjustment steps.

The capacitance of the variable capacitance unit may be variable by means of the voltage applied to an input of the variable capacitance. There may be feedback apparatus such as a phase-locked loop connected between the output and the variable capacitance input for stabilising the oscillator. The variable capacitance unit is preferably continuously variable.

The oscillator, or the oscillatory circuit, is preferably formed on a single integrated circuit.

The present invention also provides a method for operating a variable frequency oscillator as described above, the method comprising: retrieving from the memory information defining a set of the trimming capacitances; connecting that set of the trimming capacitances between the first node and the second node; comparing the voltage at the variable capacitance input with a first preset voltage range; and

if that voltage is outside the first preset voltage range determining, based on the voltage at the variable capacitance input, an adjusted set of the trimming capacitances and storing in the memory information defining that adjusted set of the trimming capacitances. The said step of determining may be performed only if the voltage at the variable capacitance input is inside a second preset voltage range. In the step of storing, the information defining the adjusted set of the trimming capacitances may be stored so as to replace in the memory the said information defining a set of the trimming capacitances.

The present invention will now be described by way of example, with reference to the accompanying drawings, in which:

figure 3 shows the circuit of a variable frequency oscillator; and

figure 4 shows a control arrangement for the circuit of figure 3.

In figures 3 and 4 like components are numbered as for figure 1.

Figure 3 shows a variable oscillator circuit for a radio terminal, which can be implemented on a single integrated circuit. The variable oscillator circuit shown in figure 3 comprises a resonant section 1 and an amplification stage 3. The resonant section includes a capacitive section indicated generally at 5 and 6 and an inductive section 7. In the circuit of figure 3 the capacitive sections include an array of switchable trimming capacitances 10, 11, 12 and 13, 14, 15 which can be selectively switched into the resonant circuit by respective transistors 22, 23, 24 and 19, 20, 21 to allow the circuit to be trimmed digitally.

In more detail, the resonant section of figure 3 includes an inductance 7 connected between the input node 4 and the output node 2 of the amplification section. The capacitors 10-12 are connected in parallel between node 4 and signal ground. In series with each capacitor 10-12 is a respective switching transistor 16-18. Each switching transistor is connected so that when a suitable voltage is applied to its gate from the corresponding switching input line 22-24 current can flow between its source and drain so that the capacitor with which it is connected in series is coupled between node 4 and signal ground. A variable

capacitance branch is connected between node 4 and signal ground. Identical circuitry is connected to node 2, comprising capacitors 13, 14 and 16 and associated transistors 19, 20 and 21.

After the circuit has been manufactured on-chip it can be trimmed by switching one or more of the capacitors 10-15 etc. fully into or out of the circuit and thereby altering the effective capacitance of the whole resonant section 1 of the oscillator.

The trimming of the circuit could be performed each time the terminal is turned on, for example by comparing the output of the circuit with a standard received frequency. Alternatively, the trimming operation could be performed at the manufacture stage. Since each trimming capacitance is switched fully into or out of the circuit the trimming is a digital operation. The setting of the switching transistors 16-21 etc. can be represented as a binary number with one digit corresponding to the switching input to each switching transistor. The setting of the trimming capacitors can therefore be stored digitally by memory of the radio terminal during manufacture or use and reproduced exactly when required by recalling the appropriate setting from memory. More than one setting could be stored (either at manufacture or during use) for different applications, such as different operating frequencies or temperatures.

Figure 4 shows one preferred arrangement for controlling the oscillator 1, 3. The output of the oscillator passes to a PLL 24 comprising a divider 25, a phase detector 26 and a loop filter 30. The difference in phase of the divided signal and reference signal is fed back to the control input 9 of the oscillator. The switching control inputs 22-27 etc. of the oscillator are driven from an oscillator control unit 28. The control unit is under the supervision of a main processor 29 of the radio terminal. The control unit 28 monitors the voltage at control input 9. The control unit adjusts the switching of the trimming capacitors with the aim that the voltage at 9 is as close as possible to a preset value. By performing this operation at each operating frequency of the terminal the control unit 28 keeps the loop gain of the circuit relatively constant.

The control unit 28 could retrieve preferred settings for the switching inputs 22-27 etc. at each operating frequency from memory 30. To switch frequencies the control unit could then apply the stored settings to the inputs 22-27 and leave the analogue PLL to settle any residual frequency error. In this arrangement there could be no need for the control unit to influence the voltage on input 9 directly, so the oscillator control could be fully digital. The combined setting of the inputs 22-27 etc. could be viewed as a multi-bit binary trimming set signal from control unit 28.

The table of trim code settings for the switching inputs 22-27 could be stored in memory (e.g. as a table of multi-bit binary numbers) by the control unit 28, during start-up or as a background task, or during manufacture of the terminal. One algorithm for assembling the table during use is as follows:

1. Apply to the switching inputs the digital code stored in the look-up table for an operating frequency.
2. Wait for the PLL to stabilise.
3. Digitise the voltage at the varicap input 9 by means of an A-D converter in the control unit 28.
4. Compare the digitised voltage with a first preset voltage window. If the voltage is inside the first preset window then keep the present digital code setting.
5. If the voltage at the varicap input is outside the first preset window then compare the digitised voltage with a second, wider preset window. If the voltage is inside the second preset window then maintain the present digital code settings for the current radio activity (e.g. for transmitting or receiving a packet or burst of data) but adjust the code stored for the present frequency so as to increment or decrement (as appropriate) the trimming capacitance that is switched in for the present operating frequency. The adjusted code will then be employed the next time the present frequency is chosen.
6. If the voltage at the varicap input is outside the second window (in which case the unit is off-tune) abort the current radio activity and enter a re-calibration mode.

This method could also be used during a built-in self-test (BIST) operation in the terminal. The above method could be cycled through for each operating frequency. A self-test feature of this type can yield significant cost savings during production and is desirable for ensuring proper operation during use.

Whilst the transceiver is enabled it preferably continuously monitors and adjusts the digital code applied to the transistor switches to keep the analogue variable capacitance at or near its optimum capacitance value.

The array of capacitors may include any number of capacitors from two upwards. The values of the trimming capacitors could be the same or different. If the values of the trimming capacitors are different then the same number of trimming capacitors can be used to allow trimming over a wider range, saving on IC real estate. The trimming capacitors could suitably provide 128 equal steps of total capacitance. This could, for instance, be achieved by 128 capacitors of the same value, or 7 capacitors of values scaled factors of two apart.

In the re-calibration mode the control unit 28 could repeatedly monitor the voltage at the varicap input and increase or decrease the effective total trimming capacitance by switching one or more trimming capacitors in or out as appropriate until the varicap input voltage is within the first or second window. If the steps in values of the trimming capacitors are the same then a very simple trimming algorithm can be used in the control unit 28 to adjust the effective total trimming capacitance monotonically simply by switching in more or fewer capacitors. If the values of the capacitors are different then the trimming algorithm should take this into account.

Step 5 of the algorithm set out above is especially beneficial because it allows for gradual changes to counteract drifts (due, for instance, to temperature fluctuations) without the need for full re-calibration.

The trimming capacitors 10-15 are in parallel with each other and with the varicap diodes. The trimming capacitors could alternatively be in series with the varicap diodes.

The finitely adjustable portion of the capacitive section preferably allows around 50 or more finite capacitance steps, with a step size substantially smaller than the range of the varicap. This allow the varicap to be not just pulled into range at a selected finite step, but to be arranged so that a desired narrow part of its continuously variable range will yield the desired capacitance. This provides better control of loop time constant and loop response compared to a system in which at only one step setting can the varicap give the desired overall capacitance.

The range of the continuously variable capacitance (in this example the varicap) preferably provides for frequency adjustment over a very much smaller range than the total range of variation available from the capacitive section including also the finitely variable capacitance circuitry. This provides much better phase noise performance than a system in which the continuously variable capacitance accounts for a major proportion of the total adjustment range.

The radio terminal could be a radio transmitter and/or receiver. The terminal could operate according to any suitable scheme, including TDMA (time division multiple access) and FHSS (frequency hopped spread spectrum). The oscillator could be used in other applications such as tone generation.

Numerous changes could be made to the circuits shown in figures 3 and 4. For example, the output stage of the oscillator could be varied as required. The varicaps 7, 8 could be replaced or supplemented by one or more other forms of voltage, current or manually controlled capacitance, or only one variable capacitance section used, rather than the symmetric example shown in figure 3.

The applicant draws attention to the fact that the present invention may include any feature or combination of features disclosed herein either implicitly or explicitly or any generalisation thereof, without limitation to the scope of any of the present claims. In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.

CLAIMS

1. A variable frequency oscillator comprising:

an oscillatory circuit for generating a periodic output dependant on the capacitance between a first node and a second node of the circuit, and having a capacitive element connected between the first node and the second node;
the capacitive element comprising:

a variable capacitance unit, the capacitance of which is variable for varying the frequency of the output; and

a plurality of trimming capacitances each being selectively connectable in parallel with the variable capacitance unit between the first node and the second node to trim the frequency of the output.

2. A variable oscillator as claimed in claim 1, wherein the trimming capacitances are each selectively connectable between the first node and the second node.

3. A variable oscillator as claimed in claim 1 or 2, wherein the trimming capacitances are each selectively connectable in parallel with each other.

4. A variable oscillator as claimed in any preceding claim, wherein a switch is connected in series with each trimming capacitance between the first node and the second node for selectively connecting the respective trimming capacitance between the first node and the second node in response to a respective switching signal.

5. A variable oscillator as claimed in claim 4, wherein each switch is a switching transistor.

6. A variable oscillator as claimed in any preceding claim, comprising control apparatus for causing a set of the trimming capacitances to be connected between the first node and the second node.

7. A variable oscillator as claimed in claim 6 as dependent on claim 4 or 5, wherein the control apparatus is capable of generating the said switching signals.
8. A variable oscillator as claimed in claim 6 or 7, comprising a memory coupled to the control apparatus for storing information defining one or more sets of the trimming capacitances.
9. A variable oscillator as claimed in claim 8, wherein each of the said one or more sets corresponds to a respective operating frequency of the oscillator.
10. A variable oscillator as claimed in claim 8 or 9, wherein the control apparatus is capable of retrieving from the memory information defining a set of the trimming capacitances and causing that set of the trimming capacitances to be connected between the first node and the second node.
11. A variable oscillator as claimed in any preceding claim, wherein at least one of the trimming capacitances has a different capacitance value from another of the trimming capacitances.
12. A variable oscillator as claimed in any preceding claim, wherein the capacitance of the variable capacitance unit is variable by means of the voltage applied to a variable capacitance input.
13. A variable oscillator as claimed in claim 12, comprising feedback apparatus connected between the output and the variable capacitance input for stabilising the oscillator.
14. A variable oscillator as claimed in claim 13, wherein the feedback apparatus is a phase-locked loop.
15. A variable oscillator as claimed in any preceding claim, wherein the variable capacitance unit is a variable capacitance diode.

16. A radio terminal comprising a variable oscillator as claimed in any preceding claim.

17. A method for operating a variable frequency oscillator as claimed in any of claims 12 to 14 as dependant directly or indirectly on claim 8, the method comprising:

- retrieving from the memory information defining a set of the trimming capacitances;

- connecting that set of the trimming capacitances between the first node and the second node;

- comparing the voltage at the variable capacitance input with a first preset voltage range; and

- if that voltage is outside the first preset voltage range determining, based on the voltage at the variable capacitance input, an adjusted set of the trimming capacitances and storing in the memory information defining that adjusted set of the trimming capacitances.

18. A method as claimed in claim 17, wherein the said step of determining is performed only if the voltage at the variable capacitance input is inside a second preset voltage range.

19. A method as claimed in claim 17 or 18, wherein, in the step of storing, the information defining the adjusted set of the trimming capacitances is stored so as to replace in the memory the said information defining a set of the trimming capacitances.

20. A variable frequency oscillator comprising:

- an oscillatory circuit for generating a periodic output dependant on the capacitance between a first node and a second node of the circuit, and having a capacitive element connected between the first node and the second node;
- the capacitive element comprising:

a variable capacitance unit, the capacitance of which is variable for continuously varying the frequency of the output over a frequency range; and

a plurality of trimming capacitances each being selectively connectable in series with the variable capacitance unit to trim the frequency of the output in steps of less than half the width of the said frequency range.

21. A variable oscillator as claimed in claim 20, wherein the variable capacitance unit is connected between the first node and an intermediate node, and the trimming capacitances are each selectively connectable in series with the variable capacitance unit between the intermediate node and the second node.

22. A variable oscillator as claimed in claim 20 or 21, wherein the trimming capacitances are each selectively connectable in parallel with each other.

23. A variable oscillator as claimed in any of claims 20 to 22, wherein a switch is connected in series with each trimming capacitance between the intermediate node and the second node for selectively connecting the respective trimming capacitance between the intermediate node and the second node in response to a respective switching signal.

24. A variable oscillator as claimed in claim 23, wherein each switch is a switching transistor.

25. A variable oscillator as claimed in any of claims 20 to 24, comprising control apparatus for causing a set of the trimming capacitances to be connected between the first node and the second node.

26. A variable oscillator as claimed in claim 25 as dependent on claim 23 or 24, wherein the control apparatus is capable of generating the said switching signals.

27. A variable oscillator as claimed in claim 25 or 26, comprising a memory coupled to the control apparatus for storing information defining one or more sets of the trimming capacitances.

28. A variable oscillator as claimed in claim 27, wherein each of the said one or more sets corresponds to a respective operating frequency of the oscillator.

29. A variable oscillator as claimed in claim 27 or 28, wherein the control apparatus is capable of retrieving from the memory information defining a set of the trimming capacitances and causing that set of the trimming capacitances to be connected between the first node and the second node.

30. A variable oscillator as claimed in any of claims 20 to 29, wherein at least one of the trimming capacitances has a different capacitance value from another of the trimming capacitances.

31. A variable oscillator as claimed in any of claims 20 to 30, wherein the capacitance of the variable capacitance unit is variable by means of the voltage applied to a variable capacitance input.

32. A variable oscillator as claimed in claim 31, comprising feedback apparatus connected between the output and the variable capacitance input for stabilising the oscillator.

33. A variable oscillator as claimed in claim 32, wherein the feedback apparatus is a phase-locked loop.

34. A variable oscillator as claimed in any of claims 20 to 33, wherein the variable capacitance unit is a variable capacitance diode.

35. A radio terminal comprising a variable oscillator as claimed in any of claims 20 to 34.

36. A method for operating a variable frequency oscillator as claimed in any of claims 31 to 33 as dependant directly or indirectly on claim 27, the method comprising:

retrieving from the memory information defining a set of the trimming capacitances;

connecting that set of the trimming capacitances between the first node and the second node;

comparing the voltage at the variable capacitance input with a first preset voltage range; and

if that voltage is outside the first preset voltage range determining, based on the voltage at the variable capacitance input, an adjusted set of the trimming capacitances and storing in the memory information defining that adjusted set of the trimming capacitances.

37. A method as claimed in claim 36, wherein the said step of determining is performed only if the voltage at the variable capacitance input is inside a second preset voltage range.

38. A method as claimed in claim 36 or 37, wherein, in the step of storing, the information defining the adjusted set of the trimming capacitances is stored so as to replace in the memory the said information defining a set of the trimming capacitances.

39. A variable oscillator substantially as herein described with reference to figures 3 and 4 of the accompanying drawings.

40. A method for operating a variable oscillator substantially as herein described with reference to figures 3 and 4 of the accompanying drawings.

ABSTRACT**VARIABLE OSCILLATOR**

A variable frequency oscillator comprising: an oscillatory circuit for generating a periodic output dependant on the capacitance between a first node and a second node of the circuit, and having a capacitative element connected between the first node and the second node; the capacitative element comprising: a variable capacitance unit, the capacitance of which is variable for varying the frequency of the output; and a plurality of finite capacitances each being selectively connectable in parallel with the variable capacitance unit between the first node and the second node to trim the frequency of the output.

Figure 3

Fig. 1

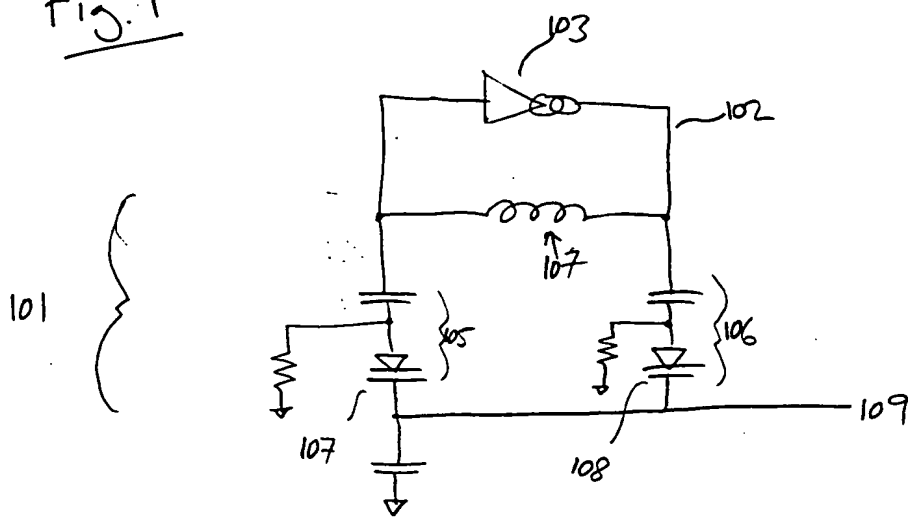


Fig. 2


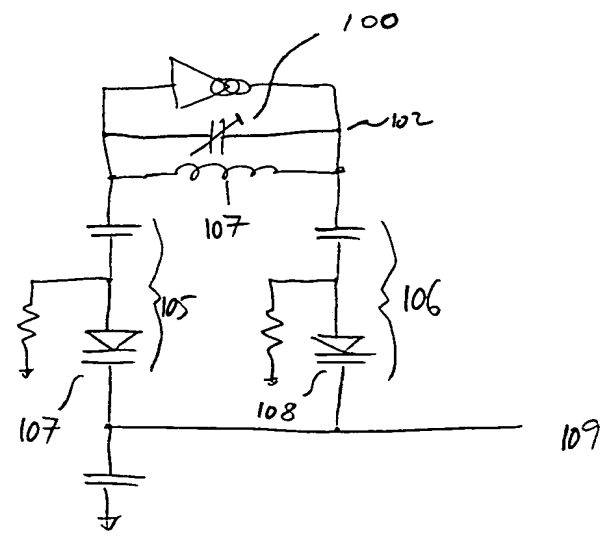


Fig. 3




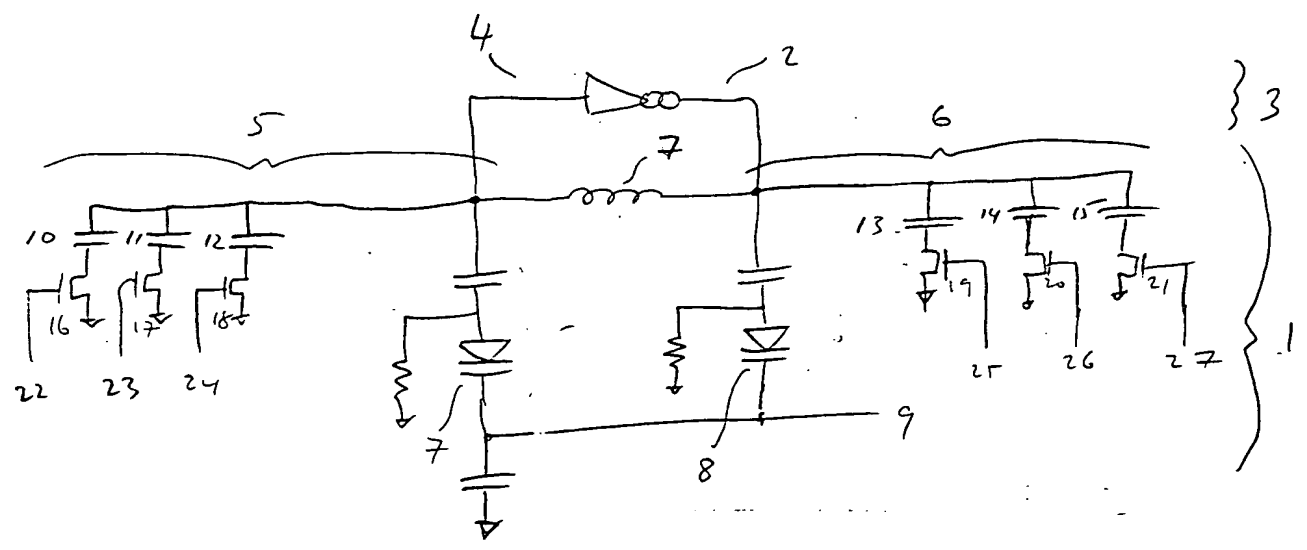

THIS PAGE BLANK (USPTO)

RECEIVED
FEB -2 2001
TC 2600 MAILROOM

Fig. 4

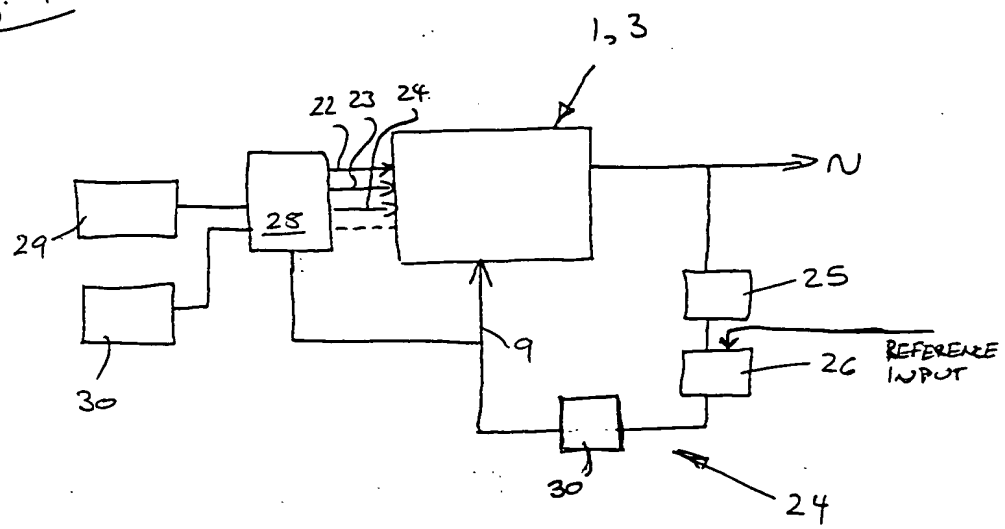



THIS PAGE BLANK (USPTO)

RECEIVED

FEB -2 2001

TC 2600 MAILROOM

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)